


ELASTOTECNICA heat shrink boots are manufactured with very resistant polyolefin to provide strain relief and environmental/mechanical protection, its interior adhesive provides sealed protection from water.

SELECTION TABLE

ORDER CODE	DESCRIPTION	OUTLETS DIAMETER BEFORE SHRINK (inches)	OUTLETS DIAMETER AFTER SHRINK (inches)	H (inches)
LV3GBB1330	HEAT SHRINK BOOT 3" 3 OUTLETS	4,3 A 1,7	2,1 A 0,8	8,90
LV3GBB2755	HEAT SHRINK BOOT 4" 3 OUTLETS	5,5 A 2,2	2,75 A 1,1	8,10
LV3GBB2755A	HEAT SHRINK BOOT 6" 3 OUTLETS	7,0 A 2,2	2,75 A 1,1	8,10

TECHNICAL SPECIFICATION

DESCRIPTION	VALUE	STANDARD
TENSILE STRENGTH	12N/mm ² (Mpa)(min)	ASTM D638
ELONGATION	300% (min)	ASTM D638
DENSITY	1,10+0,2gm/cm ³	ASTM D792
HARDNESS	45+10 shore D	ASTM D2240
WATER ABSORPTION	0.5% (max)	ASTM D570
AGING	120°C por 500 Horas	ASTM D2671
CONTRACTION TEMPERATURE	125°C	IEC 216
WORK TEMPERATURE	-40°C a +100°C	IEC 216
RESISTANCE	1x10 ohm.cm (max)	ASTM 257

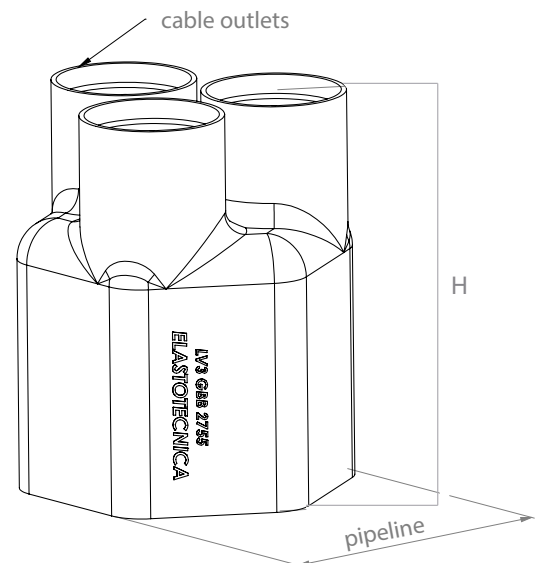

visit our
online store

Carretera Ánimas - Coyotepec Km 4 S/N , Colonia
Ixtapacalco, Coyotepec, Estado de México C.P. 54666

WWW.ELASTOTECNICA.COM.MX



(0052) 5541697000



ventas@elastotecnica.com.mx